

MV-ACU3-AM-MBM-FL-Xm USB 3.0 CABLE




Cable Description:

Accessory	Description	Length	Applicable Camera
USB 3.0 CABLE	USB3.0 Hybrid Active Optical Cable, Type A plug to Micro B plug	5 / 7 / 10 / 15 m	Hikvision USB 3.0 Camera

Order Models:

USB 3.0 Hybrid Active Optical Cable: MV-ACU3-AM-MBM-FL-Xm (Xm: 5m/7m/10m/15m)

Cable Overview:

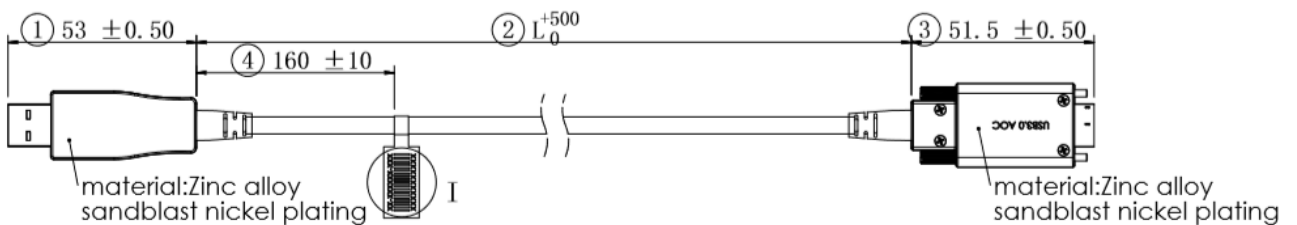

Cable Parameters:

Physical Specifications

Camera-side Connector	USB3.0 Micro-B Plug (with locking screws)
Host-side Connector	USB3.0 Standard-A Plug
Dimension of The End	Camera-side: 43.64mm/19.14mm/8mm
	Host-side: 49.46mm/23.5mm/10mm
Net Weight (Type.)	395g(10m)
Cable Diameter	4.8mm
Option Cable length	05m/07m/10m/15m
Bend Radius (Dynamic/Static)	50mm/20mm
Tensile Strength (Long Term/Short Term)	150N/300N
Crush Resistance (Long Term/Short Term)/100mm	500N/1000N
Operating/Storage Temperature	0~50°C/-20~70°C
Cable Color	Black

Table 1: Physical Specifications

Electrical Specifications

Supply Voltage	4.75~5.25V
Supply Current	<200mA
Power Dissipation	0.94W
Device Side Supply Current	Maximum 5V 900mA(05m/07m/10m/15m)

Table 2: Electrical Specifications

General Information

ROHS Compliance	Yes
CE Conformity	Yes
UL Conformity	UL 758
Warranty	1 year

Table 3: Environment Specifications

Read the user manual for the camera including the precautions before connecting the cable to the camera. The user manual also contains further information about pin assignments, power requirements, as well as comprehensive information about installing and using the camera.



Hangzhou Hikvision Digital Technology Co., Ltd.
 No.700 Dongliu Road, Binjiang District, Hangzhou, 310052, China.
 Tel: +86-400-700-5998
 Email: hikrobotics@hikvision.com