

MV-CL086-91CC-PRO

8192 P Camera Link Line Scan Camera



GEN*i*CAM






Introduction

MV-CL086-91CC-PRO uses Camera Link interface to transmit images, and its max. line rate reaches 34 kHz. It supports RGB true color and different image modes, and is applicable to printing, metallurgy, food, and other industries.

Key Feature

- Supports configuration modes of Base, Medium, and 80-bit via the Camera Link interface.
- Supports TDI function to select different image modes.
- Supports exposure time and gain adjustment, PRNUC correction, LUT, Gamma correction, etc.
- Compatible with Camera Link Protocol and GenICam Standard.

Dimension

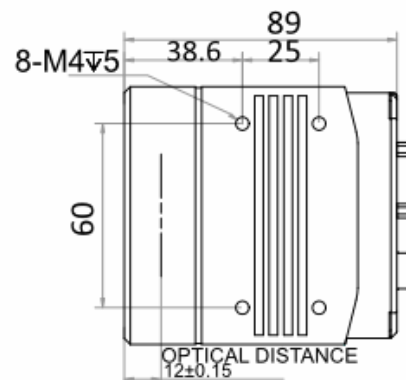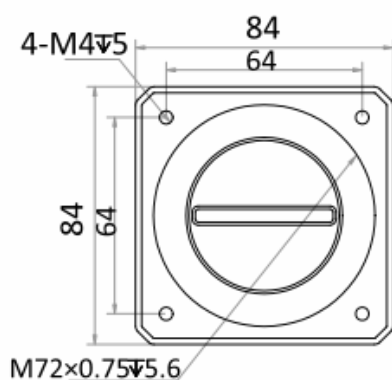

Unit: mm


Available Model

MV-CL086-91CC-PRO

Applicable Industry

Printing, metallurgy, food, logistics, transportation, material sorting, pharmaceutical manufacturing, etc.

Sensor Quantum Efficiency

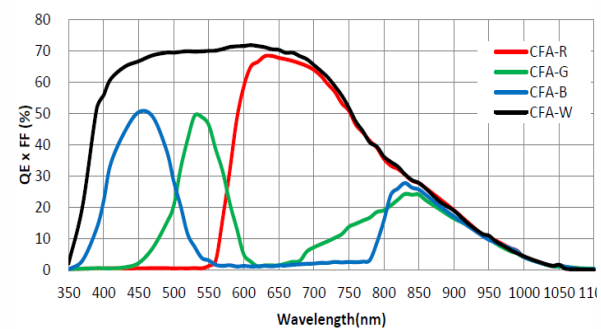

Specification

Model	MV-CL086-91CC-PRO
Camera	
Sensor type	CMOS
Pixel size	5 μm
Resolution	8192 \times 12
Image mode	Supports 1-line, 2-TDI, and 4-TDI
Max. line rate	10 kHz (Base), 20 kHz (Medium), 34 kHz (80-bit)
Configuration mode	Base, Medium, 80-bit
Tap geometry	1 \times , 1 \times 2, 1 \times 4, 1 \times 8, 1 \times 10
Tap number	1 Tap, 2 Taps, 4 Taps, 8 Taps, 10 Taps
Pixel clock	40 MHz, 66 MHz, 80 MHz, 85 MHz
Dynamic range	62 dB
SNR	42 dB
Gain	Supports 1.2 \times , 2.7 \times , and 4.6 \times
Exposure time	3 μs to 10 ms
Exposure mode	Off/ Once/ Continuous exposure mode; supports fixed exposure time, trigger-width exposure
Mono/color	Color
Pixel format	RGB, Mono 8/10
Binning	Supports 1 \times 1, 1 \times 2, 1 \times 4, 2 \times 1, 2 \times 2, 2 \times 4, 4 \times 1, 4 \times 2, 4 \times 4
Reverse image	Supports horizontal reverse image output
Trigger mode	External trigger, internal trigger
External trigger mode	Line trigger, frame trigger, line + frame trigger
Electrical features	
Data interface	Camera Link; USB interface for updating firmware
Digital I/O	12-pin P10 connector provides power and I/O: configurable input and output \times 4 (Line 0/1/3/4), and support single-end/differential. Camera Link provides I/O (CC1/CC2/CC3/CC4).
Power supply	24 VDC
Power consumption	Typ. 20.5 W@24 VDC
Mechanical	
Lens mount	M72*0.75, optical back focal length: 12 mm (0.5"), applicable to F-mount via lens adapter
Dimension	84 mm \times 84 mm \times 89 mm (3.3" \times 3.3" \times 3.5")
Weight	Approx. 883 g (1.9 lb.)
Ingress protection	IP40 (under proper lens installation and wiring)
Temperature	Working temperature: -20 $^{\circ}\text{C}$ to 60 $^{\circ}\text{C}$ (-4 $^{\circ}\text{F}$ to 140 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 80 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 176 $^{\circ}\text{F}$)
Humidity	5% to 90% RH, non-condensing
General	
Client software	MVS and frame grabber software meeting with Camera Link Protocol
Operating system	32/64-bit Windows 7/10
Compatibility	Camera Link V2.0, GenICam
Certification	CE, FCC, RoHS, KC

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.